## **SPECIFICATIONS**

MODEL NUMBER		EB-L730U	EB-L630SU	Supplied Accessories	
SKU Number		V11HA25040 V11HA29040		Power Cable: 3m	
Projection Technolo		RGB liquid crystal shutter projection system	(3LCD)	HDMI Cable: 1.8m Remote Control: Yes, with Alkaline AA Ba	
Specifications of Ma LCD	ain Parts Size	0.67" (C2 Fine)		Cable cover	
200	Resolution	WUXGA		User Guide	
	Aspect Ratio	16:10			
Projection Lens	Туре	Optical Zoom (Manual) / Focus (Manual)	No optical zoom / Focus (Manual)	Optional Accessories	
	F-Number	1.50 - 1.70	1.70	Air Filter: ELPAF56	
	Focal Length Zoom Ratio	<u>20 – 31.8 mm</u> 1.0 - 1.60	<u>11.76 mm</u> 1.0 - 1.35 (Digital Zoom)	Wireless LAN unit: ELPAP11	
	Throw Ratio	1.35 – 2.20 (Wide - Tele)	0.80 – 1.07 (Wide - Tele)	Ceiling Mount: ELPMB22 HDBaseT Transmitter: ELPHD01	
Lightsource	Туре	Laser Diode		Safety Wire Set: ELPWR01	
5	Life	20,000 hours (Normal) / 30,000 hours (Exter	nded)	Wireless Presentation System: ELPWP10	
Screen Size (Project	ted Distance)				
Zoom: Wide		50" - 500" [1.44 - 14.76 m]	50" - 200" [0.85 - 3.49 m]	EB-L730U	
Zoom: Tele Brightness*1		50" - 500" [2.35 - 23.84 m]	N/A	EB-L/300	
White Light Output (N	ormal / Extended)	7,000lm / 4,900lm	6,000lm / 4,200lm		
Colour Light Output (N		7,000lm	6,000lm		
Contrast Ratio	,	Over 2,500,000:1			
Internal Speaker(s)					
Sound Output		10W Monaural			
Keystone Correction	n	0000 Erec			
Projection Orientation Vertical / Horizontal		360° Free ±30° / ±30°		EB-L630SU	
Connectivity		100 / 100			
Analog RGB Input	D-Sub 15Pin	2			
Digital Input	HDMI	2 (HDCP 2.3)			
	HDBaseT	1 (HDCP 2.3)			
Audio Input	Stereo Mini Jack	2			
USB Input	USB Type A		y OSD Settings; Port2 for 5V/2A power supply only, no USB function)		
Control I/O	USB Type B RS-232C	1 (For Mouse, Keyboard, Control, Firmware D-Sub 9pin x 1	Update)		
Analog Video Output					
Digital Video Output	HDMI	- 1 (HDCP 2.3)			
Audio Output	Stereo Mini Jack	1			
Network	Wired LAN	RJ45 x 1 (100Mbps)			
	Wireless	Built-in			
	Optional Wireless	ELPAP11			
Wireless LAN (In-Bu					
Supported Speed for Each mode		Infrastructure: IEEE 802.11b (2.4GHz): 11 Mbps <sup>12</sup> , IEEE 802.11g (2.4GHz): 54 Mbps <sup>12</sup> , IEEE 802.11n (2.4GHz): 72.2 Mbps <sup>12</sup> ,			
		EEE 802.11a (5GHz): 54 Mbps <sup>2</sup> , IEEE 802.11n (5GHz): 150 Mbps <sup>2</sup> , IEEE 802.11ac (5GHz): 325 Mbps <sup>2</sup>			
		Access Point (Wi-Fi Direct):			
		IEEE 802.11g (2.4GHz): 54 Mbps*2, IEEE 80	2.11n (2.4GHz): 72.2 Mbps <sup>-2</sup> , IEEE 802.11a (5GHz): 54 Mbps <sup>-2</sup> ,		
		IEEE 802.11n (5GHz): 150 Mbps <sup>*2</sup> , IEEE 802			
Supported Mode Supported Security Type		Infrastructure, Access Point (Wi-Fi Direct)			
		Infrastructure: OPEN (WPA2/WPA3-PSK/ W			
		Supported EAP Type: PEAP, PEAP-TLS, EA Access Point (Wi-Fi Direct): WPA2-PSK (AES			
Wireless LAN (Using	Ontional El PAP11				
Supported Speed for		Access Point (Wi-Fi Direct):			
		IEEE 802.11g (2.4GHz): 54 Mbps <sup>*2</sup> , IEEE 80	©2021 Epson Singapore Pte Ltd. All Rigi		
		IEEE 802.11n (5GHz): 150.0 Mbps <sup>*2</sup> , IEEE 8	02.11ac (5GHz): 325Mbps <sup>*2</sup>	Reproduction in part or in whole, without permission from Epson, is strictly prohibit	
Supported Mode		Access Point (Wi-Fi Direct)		EPSON and EXCEED YOUR VISION are	
Supported Security Ty		Access Point (Wi-Fi Direct): WPA2-PSK (AES	5	trademarks of Seiko Epson Corporation.	
Operating Temperat Single Use	ure	Low Altitude (0 - 2,286m/7,500ft): 0 - 45 °C	2-32-113 °E	All other product names and other comp	
		Low Attitude (0 - 2,286m/7,500ft): 0 - 45 °C High Altitude (Over 2,286m/7,500ft to 3,048)		used herein are for identification purpose are the trademarks or registered tradema	
		20% - 80% Humidity, No Condensation		respective owners.	
Multi-projection Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 40 °C	C<32 - 104 °F>	Epson disclaims any and all rights in thos	
		High Altitude (Over 2,286m/7,500ft to 3,048		Projected images shown herein are simul	
		20% - 80% Humidity, No Condensation		The actual product design and contents Specifications are subject to change with	
Operating Altitude		Over 1,500m/4,921ft with High Altitude Mod	de: 0 - 3,048m (0 -10,000ft)	may vary between countries. Please che	
Direct Power On / C	π	Yes 8 seconds (Enson Logo): Warm un Pariad: 2	20.000	Epson offices for more information.	
Start-Up Period Quick Start-Up		8 seconds (Epson Logo); Warm-up Period: 3 Less than 5 seconds (Display)	SU SEC	Apple, iPad and iPhone are trademarks of	
Cool Down Period		ILESS than 5 seconds (Display)		registered in the U.S. and other countries a service mark of Apple Inc.	
Air Filter	Туре	Electrostatic Filter		Android is a trademark of Google Inc.	
	Maintenance Cycle <sup>*3</sup>		nded)		
Power Supply Voltag		100 - 240 V AC ±10%, 50/60 Hz			
Power Consumption				Dealer's Stamp	
Laser Diode On (Norm		345 W / 258W			
Standby (Normal / Eco		2.0W / 0.3W			
	g Feet (D X W X H)	304 x 440 x 122 mm			
Dimension Excludin		Approx 8.4kg	Approx 8/kg		
Dimension Excludin Weight Fan Noise (Normal /	Eco)	Approx. 8.4kg 38dB / 27dB	Approx. 8.4kg		

e with ISO 21118 modes and actual data throughputs depend on supported v mode of source dev

l in the general office en ent (the amount of floating dust: 0.04 - 0.2 mg/m3). Based on the Epson's in-house test result

## **BUSINESS PROJECTORS** EB-L520U/L630U/L630SU/L730U

, ELPWT01

only and s of their

ay vary it notice and with loca

f Apple Inc., . App Store is



A power-packed solution for business, education, as well as projection signage and entertainment.

Epson's versatile and compact EB-L730U series projectors are loaded with endless possibilities to project vivid and sharp images of up to 7,000 lumens<sup>13</sup> to your audience. Features such as center-lens placement, 360° installation, and a wide range of connectivity translates to a flexible and performance-focused projection solution to suit all your needs.



### Superb Image Quality

High brightness projection of up to 7.000 lumens\*3 with laser light source and WUXGA resolution.

### Compact & Flexible Lightweight yet durable body with a myriad of installation options.

Find out more at www.epson.com.sg/projectors

📑 EpsonSEA 💿 EpsonSEA 🎔 EpsonSEA 🕒 EpsonSoutheastAsia

Printed April 202

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500 100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours Epson Singapore Pte Ltd Epson Customer Care Center

\*1 For EB-L630SU. \*2 Except for EB-L520U. \*3 For EB-L730U.





**Seamless Connectivity** Enjoy convenience in projection via wireless connections without troublesome settings.

# Massive and Brilliant. Stunning images beyond FULL HD.

Immerse in a stimulating and dynamic viewing experience with WUXGA resolution. Captivate your audience in lectures and meetings, impress your customers in stores, and maximise your reach at larger venues.



High Brightness Up to 7,000 lumens\*1

Large Screen Size Up to 500"\*2

**High Contrast Ratio** Over 2,500,000:1

Laser Light Source Up to 20,000\*3 maintenance free hours





\*1 For EB-L730U. Brightness for EB-L630U is 6,200 lumens, EB-L630SU is 6,000 lumens, EB-L520U is 5,200 lumens \*2 Except EB-L630SU. Maximum screen size for EB-L630SU is 200 inch.

\*3 20,000H life for Laser light source: Approximate time until brightness decreases 50% from first usage. Measured by acceleration text assuming use of 0.04 - 0.20 mg/m3 of particulate matter. Time varies depending on usage conditions and environments. Replacement of parts other than the light source may be required in a shorter period.




## Fascinate more with super-resolution

Project detailed and crisp images with the Image Enhancement function. With a few simple steps, deliver enthralling, clear projections and level up your presentations.



## Save both your wallet and the environment

Without the need for lamp replacements and lower power consumption than its peers, enjoy higher savings while saving the earth with Epson's laser projectors. Do more with your maintenance-free laser projector, which runs on approximately 20,000 hours<sup>\*3</sup> of laser light source.

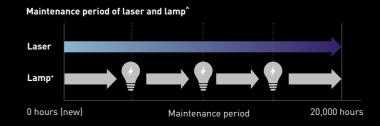

<sup>+</sup> Compared with other conventional lamp projector that has lamp life of 5,000 hours. ^ Approximate time until brightness decreases 50% from first usage. Measured by acceleration test assuming use of 0.04 - 0.20 mg/m<sup>3</sup> of particulate matter. Time varies depending on usage conditions and environments.



Without super-resolution


## Eco Features

- Uses just 0.3W of power in standby mode
- Projector optics employ lead-free lenses
- · Unpainted plastic housing reduces the environment impact
- The flame retardants used in the plastic housing does not contain chlorine or bromine
- Laser light technology\* eliminates the need for lamp replacements

Better Products for a Better Future

# Efficiency meets Flexibility. Fuss-free installation and operation.

With a wide range zoom of up to 1.6x zoom ratio<sup>\*1</sup> and flexible 360° installation, you can fit the compact Epson laser projector even in the tightest spaces, without compromising image quality. Alongside its versatile connectivity, maximise efficiency in meeting rooms and enhance the experience in retail storefronts.

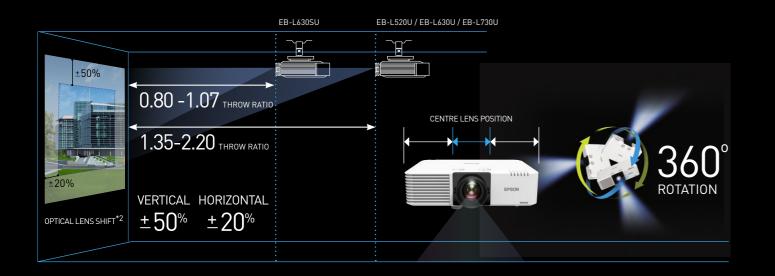

## Seamless multiple projection

Blend multiple projections seamlessly and easily into one large screen for maximum reach through Daisy-chaining with HDMI-out port. Correct any screen distortion quickly with the built-in geometric correction and edge blending function.



Wide Range Zoom & Lens Shift Up to 1.6x zoom ratio<sup>\*1</sup>

## Short Throw Capability<sup>\*3</sup> 80" screen at 1.38m Perfect for tight spaces

**Flexible Installation** Any direction in 360°

**Versatile Connectivity** 2 x HDMI & HDBaseT for long distance transmission<sup>\*4</sup>

## Customisable content playback

Create personalised content easily onto any desired surface with the built-in playback function. Upload your content wirelessly or simply connect and start projecting fuss-free. Ideal for projection signage at storefronts or places of interest.



Retail signages



Event signages

<sup>\*1</sup> Except EB-L630SU with no optical zoom, only 1.35x digital zoom.

<sup>\*2</sup> Except for L520U which has no lens shift.

<sup>\*3</sup> For EB-L630SU only.

<sup>\*4</sup> HDBaseT can transmit Full HD video, audio and control at low cost through cat 5e/6 cables or higher, up to 100 metres. Ideal for large venues.

# **Connectivity Reinvented.** Seamless collaborations without hassle.

Reinvent how collaborations happen in your meeting rooms with the optional ELPWP10 wireless presentation system. No more messy cables, additional installations and confusing network settings. Connect up to six users and project up to 4 connected devices in one screen simultaneously for enhanced collaboration.



## **Project wirelessly**

With built-in wireless connectivity, easily share content from your smart devices or PC using the Epson iProjection app.

Schedule and edit your playlist, convert movie formats, and manage data directly through Epson Content Manager.





Epson Projector Epson Content manager iProiection



**Miracast support** 

With Miracast, you can now project Full HD videos and content wirelessly from compatible smart devices and laptops without additional software installation. With the screen mirroring\* support, projecting from your smart devices has never been easier.

\* If the Miracast function is activated, other network features will be disabled



## **SPECIFICATIONS**

MODEL NUMBER		EB-L520U	EB-L630U
SKU Number Projection Technology		V11HA30040 RGB liquid crystal shutter projection system (3LCD)	V11HA2604
Specifications of Ma			
LCD	Size	0.67" (C2 Fine)	
	Resolution	WUXGA	
	Aspect Ratio	16:10	
Projection Lens	Туре	Optical Zoom (Manual) / Focus (Manual)	
	F-Number	1.50 – 1.70	
	Focal Length Zoom Ratio	20 - 31.8 mm 1.0 - 1.60	
	Throw Ratio	1.35 – 2.20 (Wide - Tele)	
Lightsource	Туре	Laser Diode	
	Life	20,000 hours (Normal) / 30,000 hours (Extended)	
Screen Size (Project	ed Distance)		
Zoom: Wide		50" - 500" [1.44 - 14.76 m]	
Zoom: Tele Brightness <sup>*1</sup>		50" - 500" [2.35 - 23.84 m]	
White Light Output (No	ormal / Extended)	5,200lm / 3,640lm	6,200lm / 4
Colour Light Output (N		5,200lm	6,200lm
Contrast Ratio		Over 2,500,000:1	
Internal Speaker(s)			
Sound Output		10W Monaural	
Keystone Correction		360° Fron	
Projection Orientation Vertical / Horizontal		360° Free ±30° / ±30°	
Connectivity		2007-200	
Analog RGB Input	D-Sub 15Pin	2	
Digital Input	HDMI	2 (HDCP 2.3)	
Audio Input	Stereo Mini Jack	2	
USB Input	USB Type A	1 (For PC Free, Firmware Update and	2 (1 Port for
		Copy OSD Settings)	Settings. Ar no USB fun
	USB Type B	1 (For Mouse, K/B, Control and Firmware Update)	THO USB TUN
Control I/O	RS-232C	D-Sub 9pin x 1	
Analog Video Output	D-Sub 15Pin	1	
Digital Video Output	HDMI	N/A	1 (HDCP 2.3
Audio Output	Stereo Mini Jack		
Network	Wired LAN Built-in Wireless	RJ45 x 1 (100Mbps) N/A	1 Vaa
	Optional Wireless	ELPAP11	Yes
Wireless LAN (In-Bu	ilt) and Screen Mirror		
Supported Speed for I		N/A	Infrastructur
			IEEE 802.11
			54 Mbps <sup>*2</sup> ,
			IEEE 802.11
			150 Mbps <sup>*2</sup> Access Poir
			IEEE 802.1
			72.2 Mbps <sup>*</sup>
			(5GHz): 150
Supported Mode		N/A	Infrastructur
Supported Security Type		N/A	Infrastructur
			Supported I
Wirolose LAN (Lleim	Optional El PAD44		Access Poir
Wireless LAN (Using Supported Speed for E		Access Point (Wi-Fi Direct):	
		IEEE 802.11g (2.4GHz): 54 Mbps <sup>*2</sup> , IEEE 802.11n (2.	4GHz): 72.2 M
		IEEE 802.11n (5GHz): 150.0 Mbps*2, IEEE 802.11ac	
Supported Mode		Access Point (Wi-Fi Direct)	
Supported Security Ty		Access Point (Wi-Fi Direct): WPA2-PSK (AES)	
Operating Temperat	ure	Low Altitudo (0 2,200m/7,5000) 0 45.00 00 4	12 °E
Single Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 45 °C <32 - 1 High Altitude (Over 2,286m/7,500ft to 3,048m/10,000	
		20% - 80% Humidity, No Condensation	
Multi-projection Use		Low Altitude (0 - 2,286m/7,500ft): 0 - 40 °C <32 - 10	04 °F>
		High Altitude (Over 2,286m/7,500ft to 3,048m/10,000	
		20% - 80% Humidity, No Condensation	
Operating Altitude		Over 1,500m/4,921ft with High Altitude Mode: 0 - 3,	048m (0 -10,0
Direct Power On / O		Yes	
Start-Up Period Quick Start-Up		8 sec (Epson Logo); Warm-up Period: 30 sec Less than 5 seconds (Display)	
Cool Down Period		Instant Off	
Air Filter	Туре	Electrostatic Filter	
	Maintenance Cycle <sup>*3</sup>	20,000 hours (Normal) / 30,000 hours (Extended)	
Power Supply Voltag		100 - 240 V AC ±10%, 50/60 Hz	
Power Consumption		222.11/ (222)1/	
Laser Diode On (Norm		293 W / 223W	345 W / 258
Standby (Normal / Ecc Dimension Excludin		2.0W / 0.3W 304 x 440 x 122 mm	
Weight		Approx. 7.7kg	Approx. 8.4
Fan Noise (Normal /	Eco)	31dB / 23dB	38dB / 27d
<sup>1</sup> Colour brightness (sole	our light output) and white	brightness (white light output) will vary depending on usage co	Inditions Colour

light output measured in accordance with IDMS 15:4:


While grin coupur-measured in bacondaria the menor of the rest of the second se

Find out more at www.epson.com.sg/projectors

Epson Singapore Pte Ltd Epson Customer Care Center

438B Alexandra Road, Block B Alexandra Technopark, #04-01/04, Singapore 119968. Tel: (65) 6586-5500

Connect up to six different users at any one time. Click on share screen and the screen will split automatically.

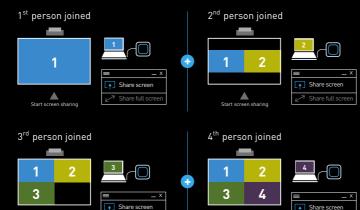

Supplied Accessories				
Power Cable: 3m				
HDMI Cable: 1.8m				
Remote Control: Yes, with Alkaline AA Batte				
Cable cover (Only for EB-L630U)				
User guide				

### Optional Accessories

Air Filter: ELPAF56 Wireless LAN unit: ELPAP11 Ceiling Mount: ELPMB22 HDBaseT Transmitter: ELPHD01 Safety Wire Set: ELPWR01 Wireless Presentation System: ELPWP10, ELPWT01

### FB-I 520U



### EB-L630U



C Freem Firmware Update and Copy OSD her port is for 5V/2A power supply,

1b (2.4GHz): 11 Mbps<sup>\*2</sup>, IEEE 802.11g (2.4GHz): IEEE 802.11n (2.4GHz); 72.2 Mbps\*2.

a (5GHz): 54 Mbps\*², IEEE 802.11n (5GHz):

EEE 802.11ac (5GHz): 325 Mbps\*2

nt (Wi-Fi Direct):

Ig (2.4GHz): 54 Mbps\*2, IEEE 802.11n (2.4GHz): <sup>2</sup>, IEEE 802.11a (5GHz): 54 Mbps<sup>+2</sup>, IEEE 802.11n

0 Mbps<sup>\*2</sup>, IEEE 802.11ac (5GHz): 325 Mbps<sup>\*2</sup> e, Access Point (Wi-Fi Direct) OPEN (WPA2/WPA3-PSK/ WPA2/WPA3-EAP)

AP Type: PEAP, PEAP-TLS, EAP-TLS, EAP-Fast (Wi-Fi Direct): WPA2-PSK (AES)

/lbps<sup>+2</sup>, IEEE 802.11a (5GHz): 54 Mbps<sup>+2</sup>,

32 - 104 °F>

32 - 95 °F>



100G Pasir Panjang Road, #01-09 Interlocal Centre, Singapore 118523. Epson Helpdesk: 800 120 5564. Please refer to www.epson.com.sg/contact for opening hours

©2021 Epson Singapore Pte Ltd. All Rights Reserved. Reproduction in part or in whole, without the written permission from Epson, is strictly prohibited. EPSON and EXCEED YOUR VISION are registered

lemarks of Seiko Epson Corporation

All other product names and other company names used herein are for identification purposes only and are the trademarks or registered trademarks of their respective owners.

Epson disclaims any and all rights in those marks. Projected images shown herein are simulations. The actual product design and contents may vary. Specifications are subject to change without notice and may vary between countries. Please check with local Epson offices for more information.

Apple, iPad and iPhone are trademarks of Apple Inc. registered in the U.S. and other countries. App Store is a service mark of Apple Inc.

Android is a trademark of Google Inc.

Dealer's Stamp

Information correct at time of printing. Printed April 2021